


POULIE VARIABLE TYPE PRB

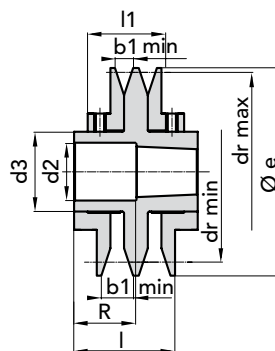

EXECUTION 3

PULLEY TYPE	EXEC. N°			BUSHE	Ø e	l	l1	b1		dr		d2	d3	R	GRUB DIN 916	SECTION	WEIGHT			
	GROOVES							min	max	min	max							UNI 5929	BELT	Kg.
PRB2 - 108	3	2	1215	108	73	58	13	20,5	68	92	48,5	60	34,5		No. 8	Z 10x6	2,40			
									70	100								M6x6	A 13x8	
									75	93										SPZ
									76	102										
PRB2 - 120	3	2	1215	120	73	58	13	20,5	80	104	48,5	60	34,5		No. 8	Z 10x6	2,65			
									82	112								M6x6	A 13x8	
									87	105										SPZ
									88	114										
PRB2 - 138	3	2	1615	138	73	58	13	20,5	98	122	58,5	74	34,5		No. 8	Z 10x6	3,60			
									100	130								M6x6	A 13x8	
									105	123										SPZ
									106	132										
PRB2 - 160	3	2	1615	160	87	68	17	26,5	108	138	58,5	74	48,5		No. 8	A 13x8	5,60			
									112	150								M8x8	B 17x11	
									114	140										SPA
									117	153										
PRB2 - 180	3	2	2012	180	87	68	17	26,5	128	158	71	90	54		No. 8	A 13x8	7,15			
									132	170								M8x8	B 17x11	
									134	160										SPA
									137	173										
PRB2 - 200	3	2	2012	200	87	68	17	26,5	149	177	71	90	54		No. 8	A 13x8	8,92			
									152	190								M8x8	B 17x11	
									155	179										SPA
									159	193										

MATERIAL **CAST-IRON G20**
UNI 5007

ADJUSTABLE V-BELTS PULLEY PRB TYPE